



Light Up The Future

LED FLOODLIGHT ECO 20W


Product Feature

- The structure be designed and made of die casting aluminium for highest efficiency of heat dissipation.
- The finished black body powder paint suitable for many area using.
- Delivers the symmetry light beam angle of 120degree with easy angle adjustable by screw lock.
- The 4 mm. tempered glass cover be withstand the impact test of level IK08.
- Be able using both of indoor and outdoor installation with rating of IP65.
- Long life span up to 40,000 hrs.

Specification


| Model | LED FLOODLIGHT ECO 20W_DL | LED FLOODLIGHT ECO 20W_WW |
|-----------------------------|------------------------------|------------------------------|
| System wattage | 20W | 20W |
| Rated input voltage | AC220-240V | AC220-240V |
| Frequency Range (Hz) | 50/60Hz | 50/60Hz |
| Power Factor | 0.9 | 0.9 |
| THDi % | <20% | <20% |
| Colour Temperature | 6500K | 3000K |
| Beam Angle | 120° | 120° |
| Luminous flux | 1600 Lm | 1500 Lm |
| Working Ambient Temperature | -10 °C~45 °C | -10 °C~45 °C |
| Working Ambient Humidity | 10%~90% | 10%~90% |
| Life Span | 40,000 hrs | 40,000 hrs |
| Protection Grade | IP65 | IP65 |

Brightness of light

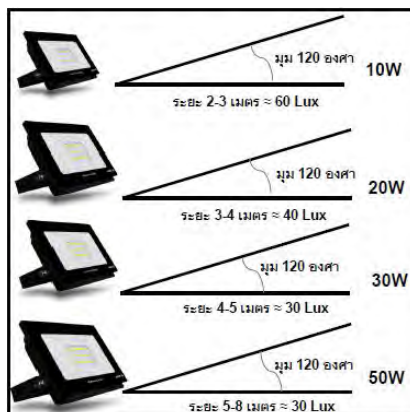

TIS. 1955-2551

Drawing

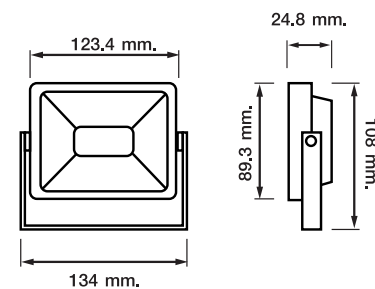

Light intensity distribution curve

